



D*H hermetically sealed connectors are designed to meet environmental conditions of extreme pressure differential. These connectors are part of the ITT Cannon D Subminiature series and are qualified to MIL-C-24308 (refer to page 41 for cross reference information). The hermetic seal prevents leakage and subsequent accumulation of corrosive moisture behind the connector. There are five basic shell sizes in both standard and thru-bulkhead designs which can accommodate from nine to 50 contacts. Polarization is achieved by the keystone

shape of the shell, a feature of all connectors within the D Subminiature series.


Locking devices are available for all shell sizes. Size 20 pin contacts are standard and have a current rating of 5 amps. † Eyelet, solder pot, and feed-thru contact terminations are available and can accommodate stranded wire up to #20 AWG. Operating temperatures range from -54°C to 150°C (-65°F to 302°F).

Your inquiries are invited regarding custom brazed component variations and special modifications.

† Military rating of #20 contacts or wires is 1.5 amps average, and 7.5 amps maximum. See explanation below.

How To Order

D*H

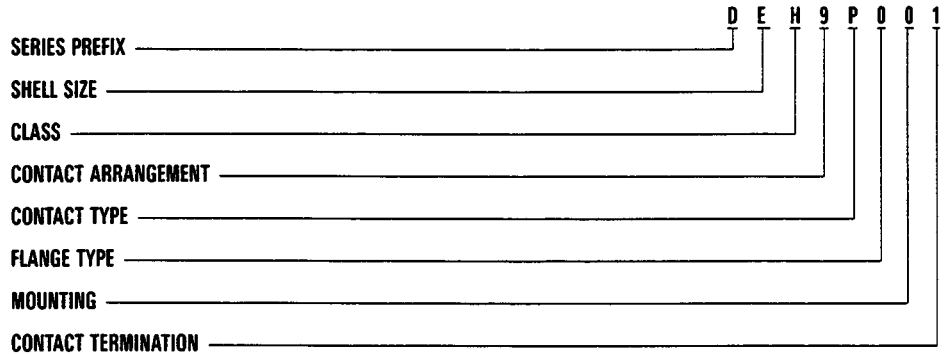

SERIES PREFIX
ITT Cannon prefix

SHELL SIZE
E, A, B, C, D

CLASS
H - Hermetic

CONTACT ARRANGEMENT
See page 41.


CONTACT TYPE
P - Pin only

FLANGE TYPE
0 - Solid flange, no mounting or locking facilities
1 - Two .120 dia. mounting holes
2 - Two jackposts accepting No. 4-40 screws

MOUNTING
0 - Standard
4 - Shell brazed to plate; can be front or rear panel mounted

CONTACT TERMINATION
1 - Eyelet
2 - Solder pot
Printed circuit contacts - Consult factory

D*TBH

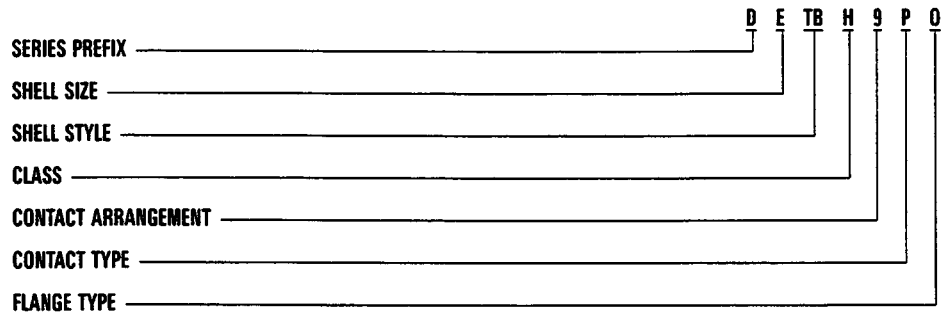

SERIES PREFIX
ITT Cannon prefix

SHELL SIZE
E, A, B, C, D

SHELL STYLE
TB - Thru-bulkhead

CLASS
H - Hermetic

CONTACT ARRANGEMENT
See page 41.

CONTACT TYPE
P - Pin only

FLANGE TYPE
00 - Solid flange, no mounting or locking facilities
10 - Two .120 (3.05) dia. mounting holes
20 - Two jackposts accepting #4-40 screws on layout identification side
30 - Two jackposts on both sides (D*TBH only)

D*H

Materials and Finishes

Shell -	In accordance with ASTM 620, 619, 568 - Low carbon steel, plated with electro-deposited tin over cadmium over copper flash
Insulator -	Compression glass
Contacts -	In accordance with ASTM A108 - Steel, plated with electro-deposited tin over cadmium over copper flash

Military vs. ITT Cannon Current Ratings

The ITT Cannon rating for #20 contacts is 5 amps, which means 5 amps for all contacts simultaneously. MIL-W-5088 rates #20 contacts at 7.5 amps maximum. The explanation is as follows:

MIL-W-5088B, Paragraph 3.9.2.1.2 specifies: "Table 1 current ratings for cables in bundles are based upon 15 or more cables carrying no more than 20% of the total carrying capacity of the bundle."

Table 1 specifies a current rating of 7.5 amps maximum for single wires in bundles of 15 or more wires. NOTE: Wires and contacts are both considered to be in the category of conductors.


Explanation

If 15 wires (normally rated at 7.5 amps per wire maximum, or at a total bundle current of 112.5 amps) are not to carry more than 20% of the total 112.5 amps, the average current rating per wire is 20% of 112.5 amps (total bundle capacity) divided by 15 (number of wires).

Conclusion

The Military rating of #20 contacts or wires is 1.5 amps average (based on 15 wires per bundle or 15 contacts per plug) vs an ITT Cannon rating of 5 amps.

Average Maximum Temperature vs Connector Size for various current ratings of mated pairs of D Subminiature connectors

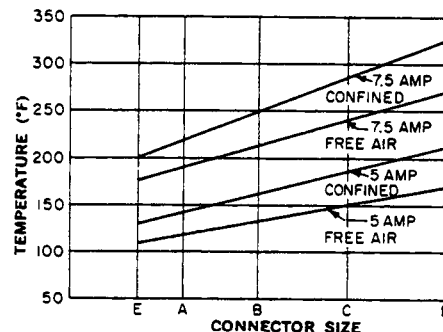

Notes:

1. Free air condition. Connectors not shielded from ambient condition in any manner.
2. Confined condition. Connectors placed in insulated box (1 x 2 x 3.5) during test, with no moving air.
3. Average maximum temperature stabilization: 1 hour or less in all cases.
4. All contacts in each mated pair tested were wired in series with specified current flowing.
5. Ambient conditions 77°F, 50% rh.

Test Data


All voltages are measured from contact to shell, in unmated condition.

Voltage Rating (ac)	Altitude (feet)			
	Sea Level	20,000	50,000	70,000
Test (Max.)	750	625	225	175

- Insulation Resistance - 5,000 megohms min. when tested per MIL-STD-202A, Method 302
- Contact Voltage Drop - 6.67 millivolts per amp max. when mated with any Original D or GOLDEN-D connector receptacle
- Air Leakage Rate - 1 micron cubic ft/hour max. (1.04 x 10⁻⁵ cc/sec.) at 1-atm pressure differential
- Vibration Resistance Ref. MIL-C-24308 - Exceeds test requirements of MIL-STD-202, Method 204, Condition B
- Corrosion Resistance Ref. MIL-C-24308 - Exceeds requirements of 48 hour salt spray exposure, tested in accordance with MIL-STD-202, Method 101
- Shock Ref. MIL-C-24308 - Exceeds tests for MIL-STD-202 Method 213


Standard

D*H

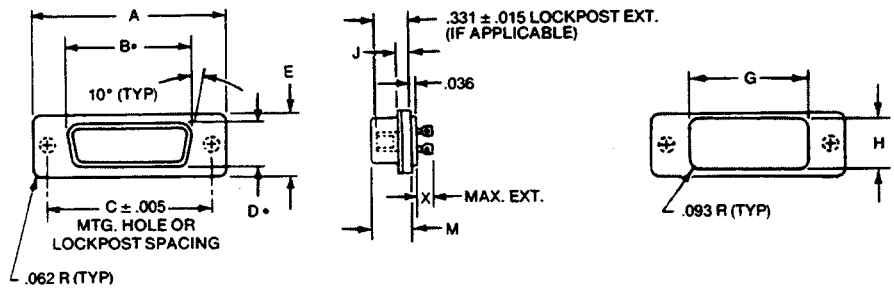

Through Bulkhead

D*TBH

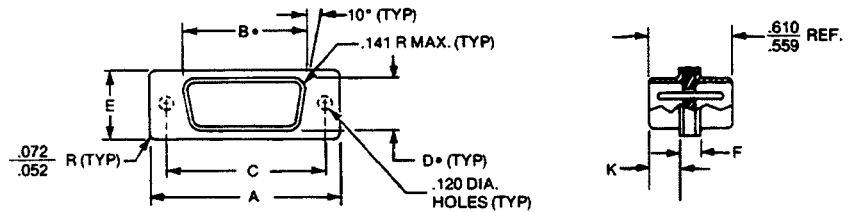

Note: Contact identification one side only.
Mounting capability either side.


Part Number by Shell Size	A ±.010 (0.25)	B* ±.010 (0.25)	C ±.005 (0.13)	D* ±.010 (0.25)	E ±.010 (0.25)	F +.014 (0.36) -.005 (0.13)	G ±.010 (0.25)	H ±.010 (0.25)	J ±.010 (0.25)	K ±.008 (0.20)	M ±.015 (0.38)	X Solder	X Eyelet
DEH9P*	1.208 (30.68)	.703 (17.86)	.984 (24.99)	.366 (9.30)	.498 (12.65)	—	.725 (18.42)	.369 (9.37)	.094 (2.39)	—	.334 (8.48)	.238 (6.05)	.161 (4.09)
DETBH9P*	1.208 (30.68)	.703 (17.86)	.984 (24.99)	.366 (9.30)	.498 (12.65)	.112 (2.84)	—	—	—	.236 (5.99)	—	—	—
DAH15P*	1.545 (39.24)	1.029 (26.14)	1.312 (33.32)	.366 (9.30)	.498 (12.65)	—	.932 (23.67)	.369 (9.37)	.094 (2.39)	—	.334 (8.48)	.238 (6.05)	.161 (4.09)
DATBH15P*	1.545 (39.24)	1.029 (26.14)	1.312 (33.32)	.366 (9.30)	.498 (12.65)	.112 (2.84)	—	—	—	.236 (5.99)	—	—	—
D8H25P*	2.093 (53.16)	1.589 (40.36)	1.852 (47.04)	.384 (9.75)	.498 (12.65)	—	1.479 (35.57)	.369 (9.37)	.103 (2.62)	—	.334 (8.48)	.238 (6.05)	.161 (4.09)
DBTBH25P*	2.093 (53.16)	1.589 (40.36)	1.852 (47.04)	.384 (9.75)	.498 (12.65)	.128 (3.25)	—	—	—	.226 (5.74)	—	—	—
DCH37P*	2.733 (69.42)	2.237 (56.82)	2.500 (63.50)	.384 (9.75)	.498 (12.65)	—	2.125 (53.98)	.369 (9.37)	.103 (2.62)	—	.334 (8.48)	.238 (6.05)	.161 (4.09)
DCTBH37P*	2.733 (69.42)	2.237 (56.82)	2.500 (63.50)	.384 (9.75)	.498 (12.65)	.128 (3.25)	—	—	—	.226 (5.74)	—	—	—
DDH50P*	2.640 (67.06)	2.133 (54.18)	2.406 (61.11)	.490 (12.45)	.610 (15.49)	—	2.000 (50.80)	.500 (12.70)	.103 (2.62)	—	.334 (8.48)	.238 (6.05)	.161 (4.09)
DBTBH50P*	2.640 (67.06)	2.133 (54.18)	2.406 (61.11)	.490 (12.45)	.610 (15.49)	.128 (3.25)	—	—	—	.226 (5.74)	—	—	—

*Add contact termination mounting, and flange type; see part number explanation.
•Dimensions B and D are measured as outside dimensions from the start of the radius corner.


Mounting Dimensions

Hermetic sealing is effective only when connectors are front panel mounted, except for brazed assemblies in which both shells are brazed to the plate. Brazed assemblies may be used for either front or rear panel mounting, and entire connector is subject to leak test. Consult factory for other rear mounting applications.

D*H



D*TBH




Part Number by Shell Size	C ±.005 (0.13)	P	S	U Min.	V Min.
DEH9P.*	.984 (24.99)	.735 (18.67)	.379 (9.63)	.794 (20.17)	.457 (11.61)
DETBH9P.*	.984 (24.99)	—	—	.794 (20.17)	.457 (11.61)
DAH15P.*	1.312 (33.32)	.942 (23.93)	.379 (9.63)	1.120 (28.45)	.457 (11.61)
DATBH15P.*	1.312 (33.32)	—	—	1.120 (28.45)	.457 (11.61)
DBH25P.*	1.852 (47.04)	1.489 (37.82)	.379 (9.63)	1.682 (42.72)	.477 (12.12)
DBTBH25P.*	1.852 (47.04)	—	—	1.682 (42.72)	.477 (12.12)
DCH37P.*	2.500 (63.50)	2.135 (54.23)	.379 (9.63)	2.330 (59.18)	.477 (12.12)
DCTBH37P.*	2.500 (63.50)	—	—	2.330 (59.18)	.477 (12.12)
DDH50P.*	2.406 (61.11)	2.010 (51.05)	.510 (12.95)	2.226 (56.54)	.583 (14.81)
DDTBH50P.*	2.406 (61.11)	—	—	2.226 (56.64)	.583 (14.81)

Cross-Reference Chart


Military Part No.	ITT Cannon Part No.	Military Part No.	ITT Cannon Part No.	Military Part No.	ITT Cannon Part No.
M24308/9-1	DEH9P002	M24308/9-8	DBH25P001	M24308/9-15	DDH50P202
M24308/9-2	DAH15P002	M24308/9-9	DCH37P001	M24308/9-16	DEH9P201
M24308/9-3	DBH25P002	M24308/9-10	DDH50P001	M24308/9-17	DAH15P201
M24308/9-4	DCH37P002	M24308/9-11	DEH9P202	M24308/9-18	DBH25P201
M24308/9-5	DDH50P002	M24308/9-12	DAH15P202	M24308/9-19	DCH37P201
M24308/9-6	DEH9P001	M24308/9-13	DBH25P202	M24308/9-20	DDH50P201
M24308/9-7	DAH15P001	M24308/9-14	DCH37P202		

Contact Arrangements


Face View
Pin Insert



E
9
#20




A
15
#20



B
25
#25

Shell Size
No. of Contacts
Contact Size



C
37
#20



D
50
#20

Shell Size
No. of Contacts
Contact Size

D*