

# MANUAL SCISSOR LIFT




## Standard equipment:

- Emergency stop button
- Emergency lowering system
- Adjust support legs
- Safety service sturt

## Option:

- Platform extension

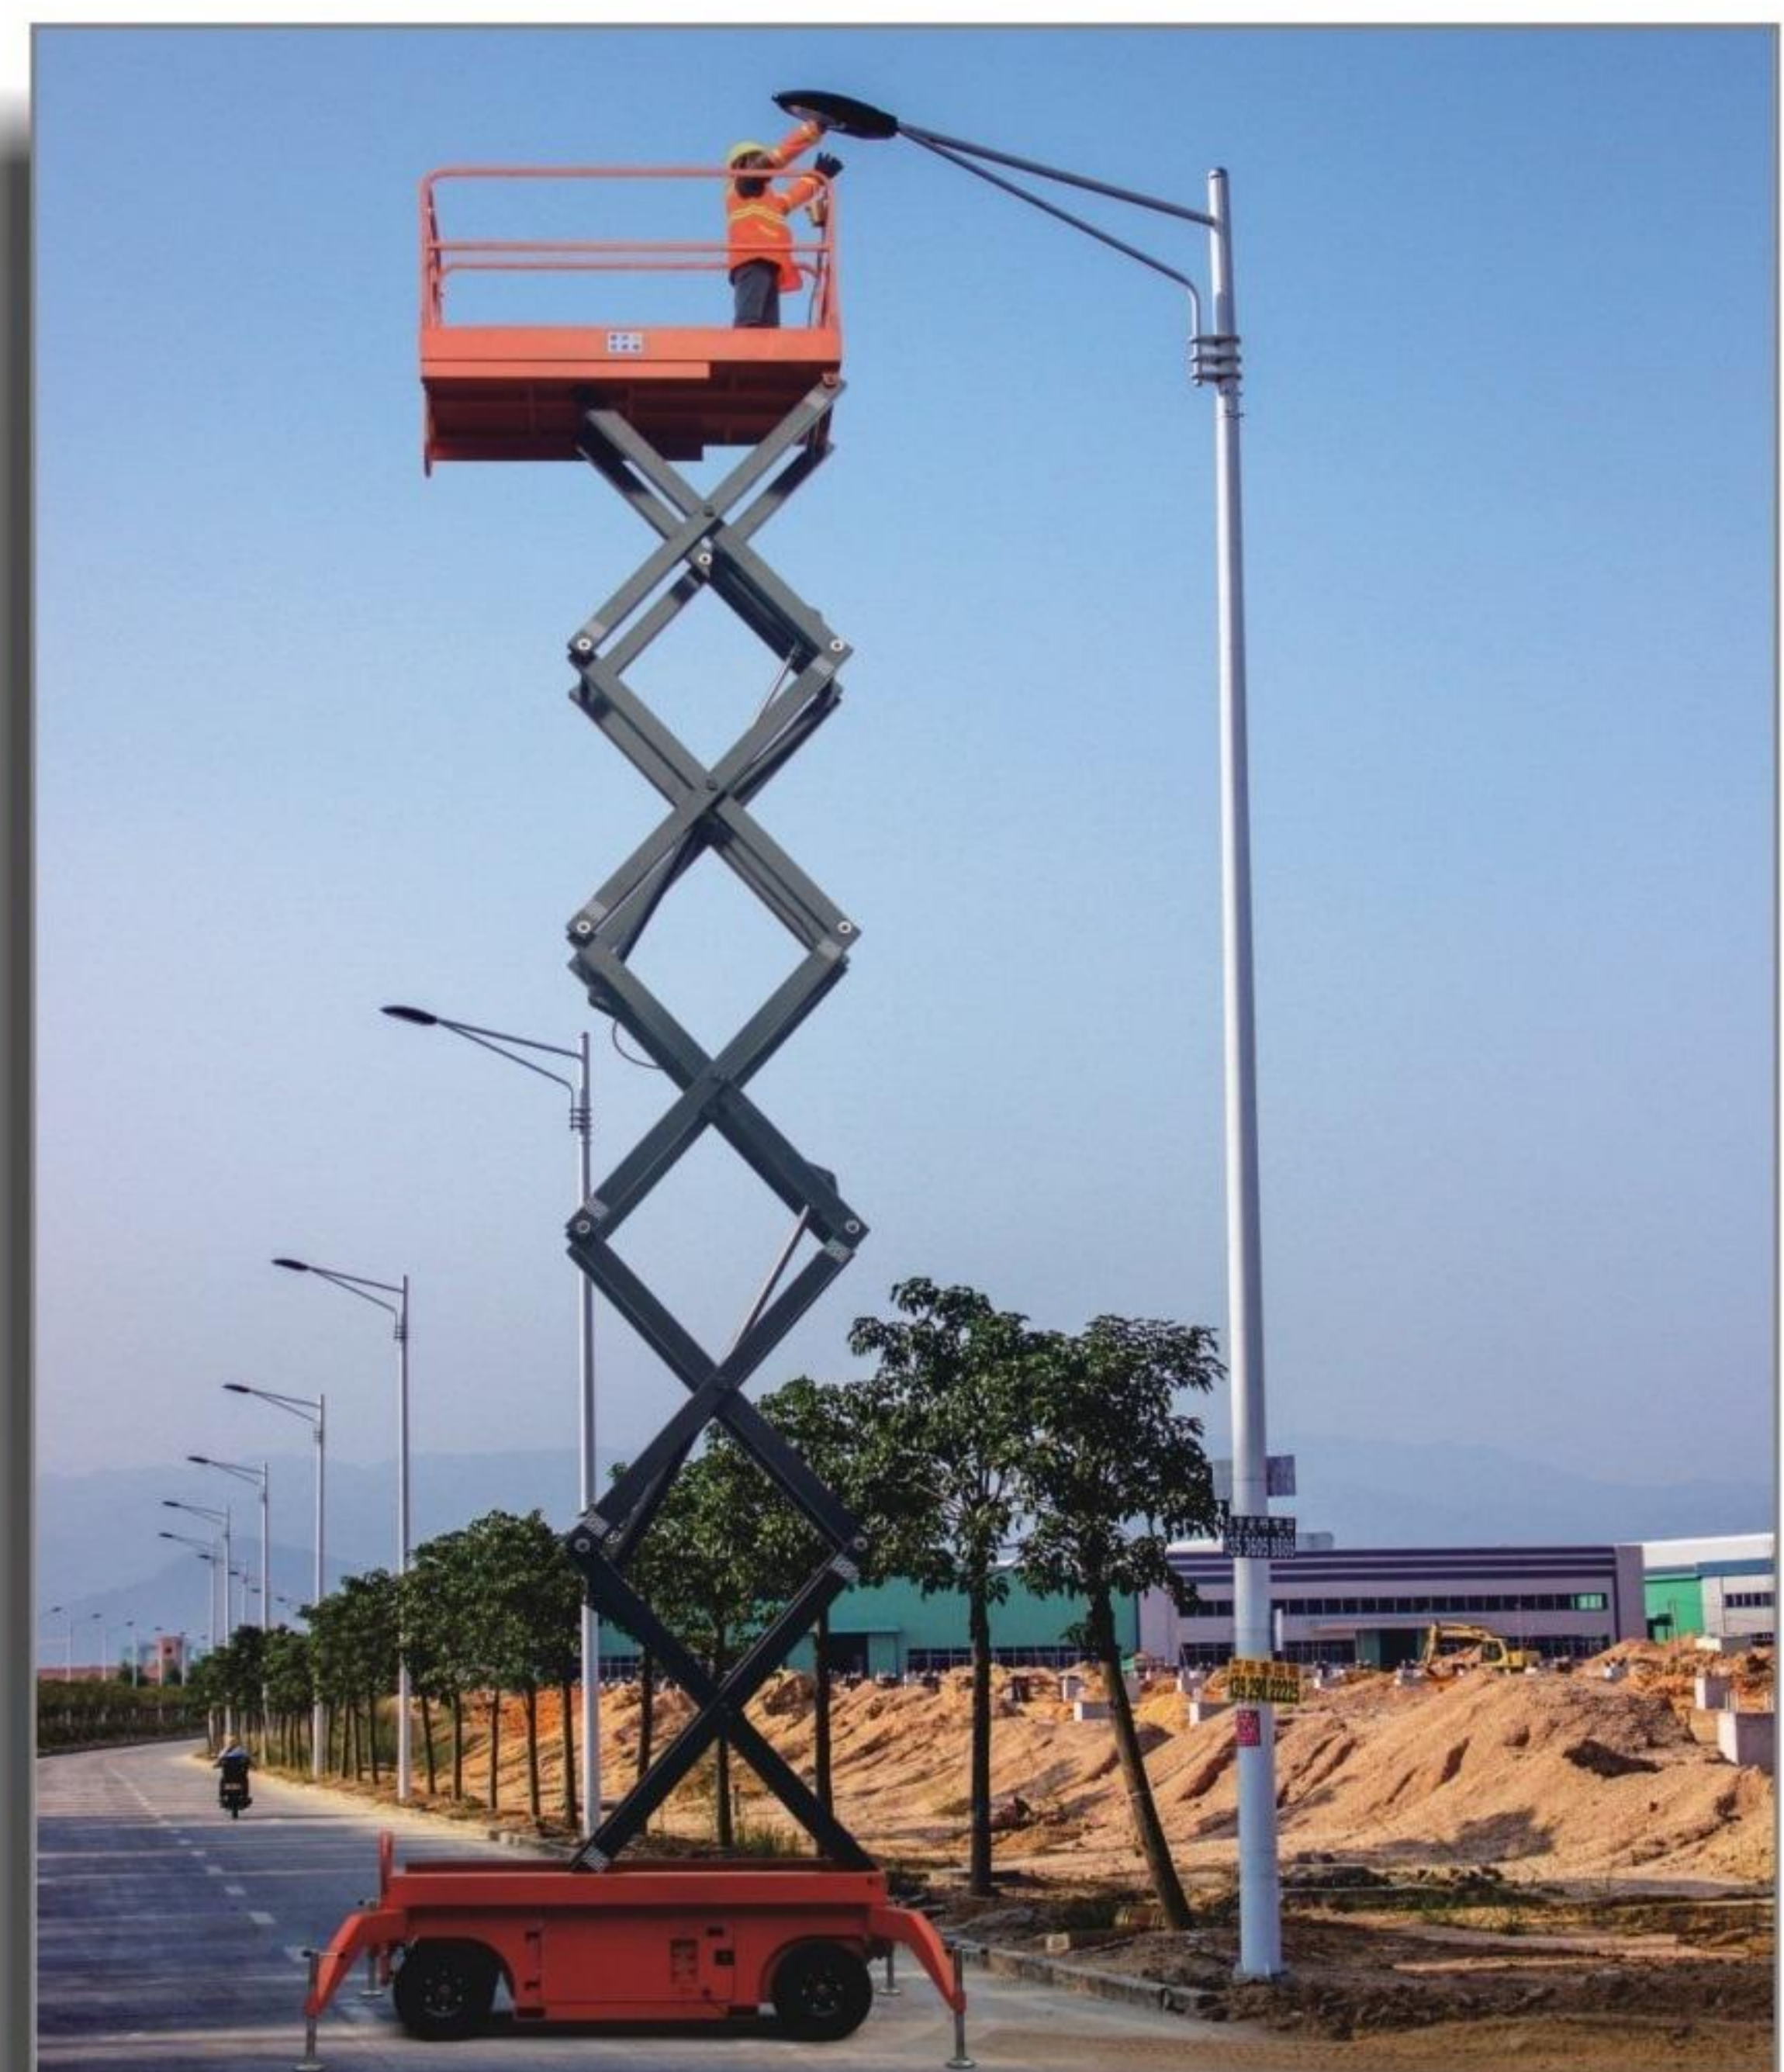

## PARAMETER TABLE

Model	GTJY0845	GTJY1045	GTJY1232
Capacity (kg)	450	450	320
Max Platform height H3(m)	8	10	12
Max working height H4 (m)	10	12	14
Platform size L2xW2 (m)	2.2X1	2.2X1	2.55X1
Platform extension size L3 (m)	0.9	0.9	0.9
Overall length L1 (m)	2.26	2.26	2.61
Overall width W1 (m)	1.12	1.12	1.12
Overall height H2 (m)	1.67	1.79	1.91
Overall height H1 (m)	2.53	2.65	2.77
Overall height (with extension platform)(m)	2.08	2.20	2.32
Supporting leg open (M/N)(m)	2.7X2.6	2.7X2.6	3X2.9
Ground clearance D (m)	0.1	0.1	0.1
Wheelbase S (m)	1.64	1.64	1.99
wheel-base T (m)	0.94	0.94	0.94
Front wheels size	448X122	448X122	448X122
Rear wheel	448X122	448X122	448X122
Battery	2-12V/120Ah	2-12V/120Ah	2-12V/120Ah
Integrated charger	24V/15A	24V/15A	24V/15A
Lifting motor (AC)	220V/3KW	220V/3KW	220V/3KW
Lifting motor (DC)	24V/3KW	24V/3KW	24V/3KW
Lifting/Lowering time (S)	50/45	60/55	72/67
Self weight (kg)	1700	1850	2150

