


Leakage Current Analyzer for Online Condition Analysis of Metal Oxide Surge Arrestor

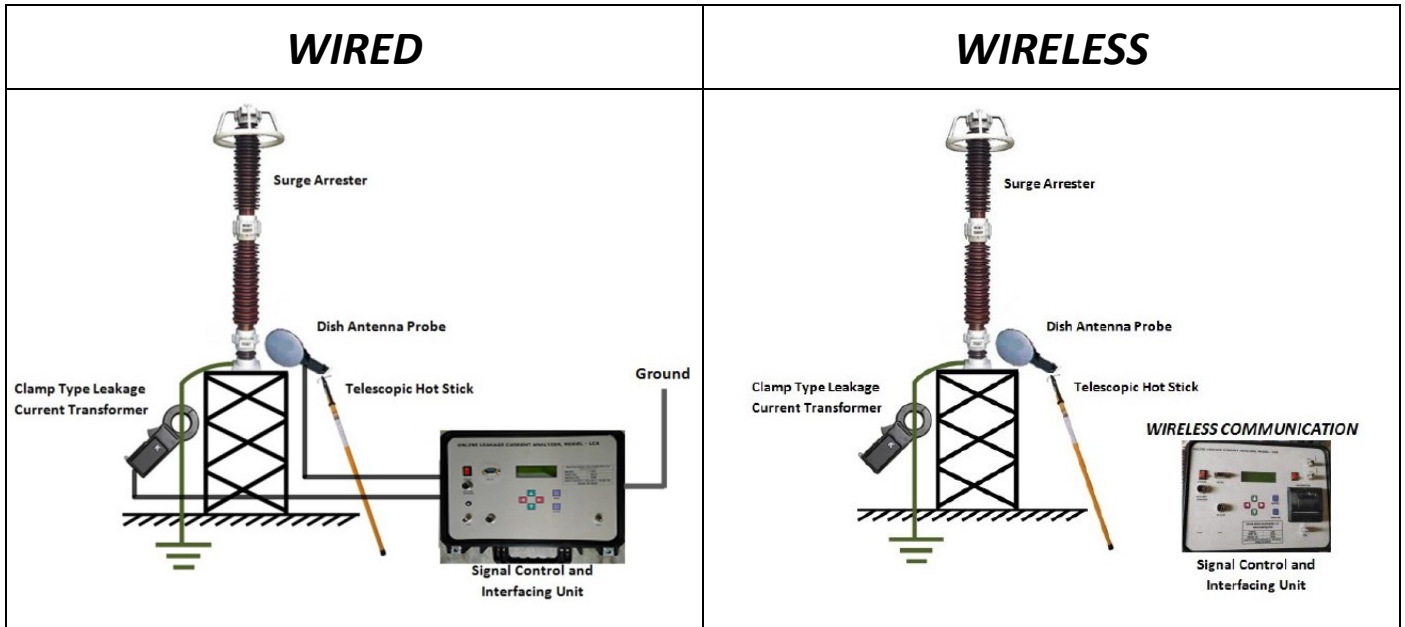

Technical Specifications

- ⇒ Total Leakage Current : 0 to 20mA
- ⇒ Third Harmonic Resistive Leakage Current : 0 to 20mA
- ⇒ Field Probe Current : 0 to 20mA / 0 to 10 V AC
- ⇒ Resolution : 0.1 μ A (for all above currents)
- ⇒ Accuracy : \pm 1% of reading
- ⇒ IP Classification : IP 67 / IP 40 (Closed & Open Case)

Operating Parameters

Display : LCD Screen (4 lines x 20 Characters)
 Operating Temperature : -10 °C to +60 °C
 Storage Temperature : -20 °C to +70 °C
 Humidity : 95% RH (Non condensing)
 Memory : 1000 Results
 Battery : Rechargeable Battery (Capacity 12 hours approx.)
 Telescopic Hot Stick : Open Length 2.5 m / 4 m / 8 m

For more information and price  marketing@josts.in

● Bengaluru ● Chennai ● Delhi ● Kolkata ● Mumbai ● Pune ● Secunderabad ● Vadodara

Diverse Technology... Integrated Approach